

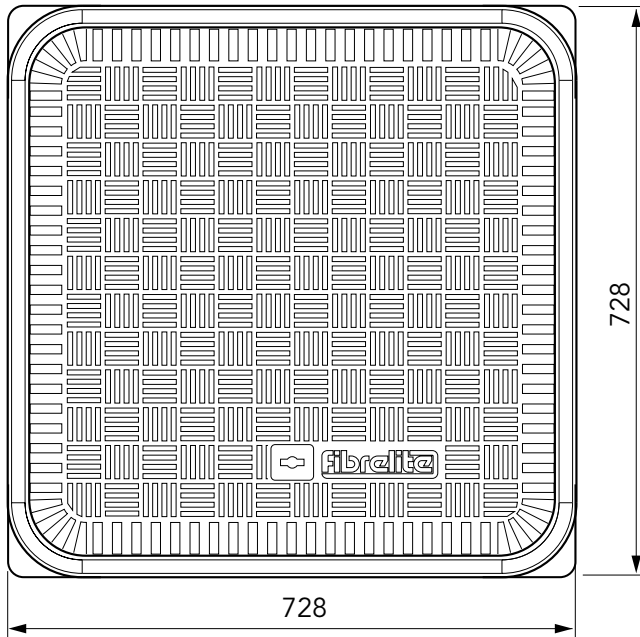


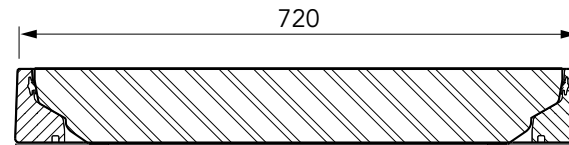

600mm x 600mm flat sealed composite cover with an aluminium frame.

*For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.*

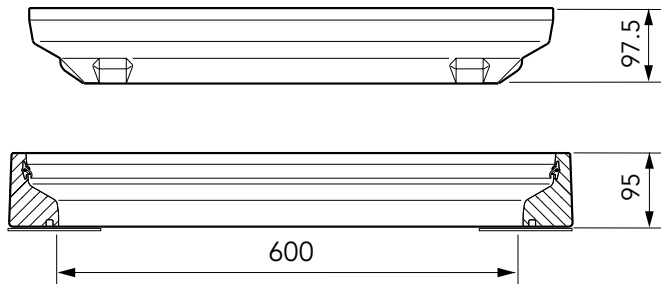

Load Rating	Cover Weight (kg)	Frame Weight (kg)
B125	12	11
C250	20	11
D400	24	11
F900	33	11

600mm x 600mm flat sealed composite cover with an aluminium frame.

*For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.*

**CONCRETE**


**VERY IMPORTANT**

OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM


**VERY IMPORTANT**

The underside of the frame must be adequately supported by concrete.


Expansion joint filled with petrol resistant mastics.

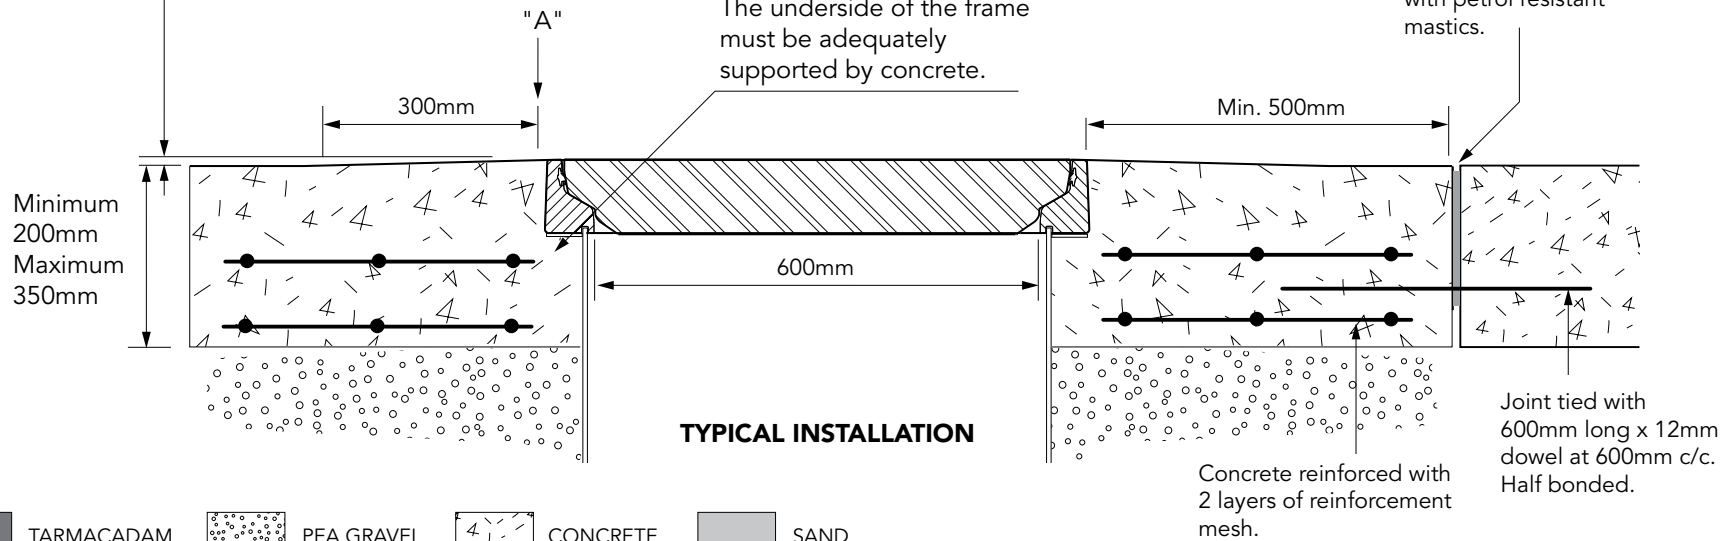

**TARMACADAM**

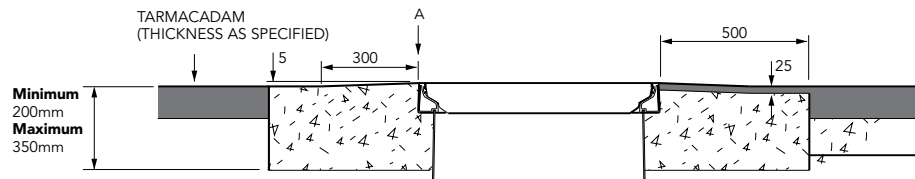

**SETTS**

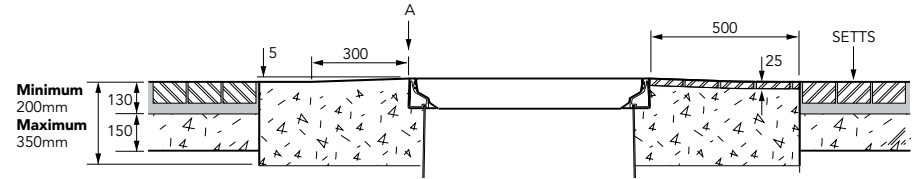

600mm x 600mm flat sealed composite cover with an aluminium frame.

*For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.*

