

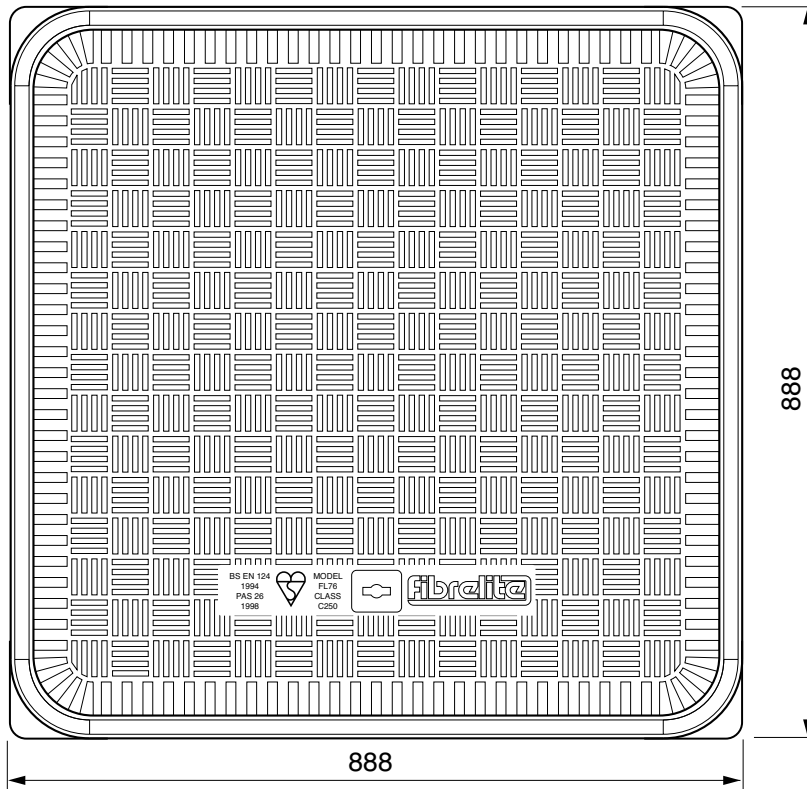


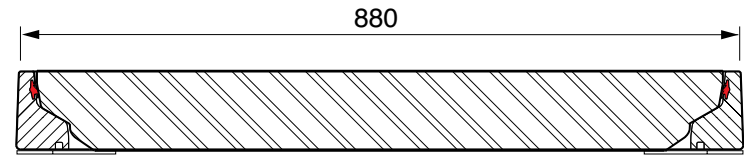

760mm x 760mm flat sealed composite cover with an aluminium frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

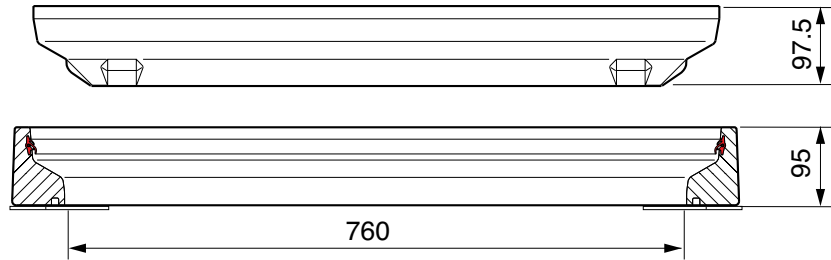

Load Rating	Cover Weight	Frame Weight
B125	18.5 kg	9 kg
C250*	29 kg	12 kg
D400	29 kg	12 kg
Airport	41 kg	13.3 kg
F900	50 kg	16 kg

* Awarded British Standard Kite Mark

760mm x 760mm flat sealed composite cover with an aluminium frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.


CONCRETE

VERY IMPORTANT

OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM

VERY IMPO RTANT
The underside of the frame must be adequately supported by concrete.

Expansion joint filled with petrol resistant mastic.

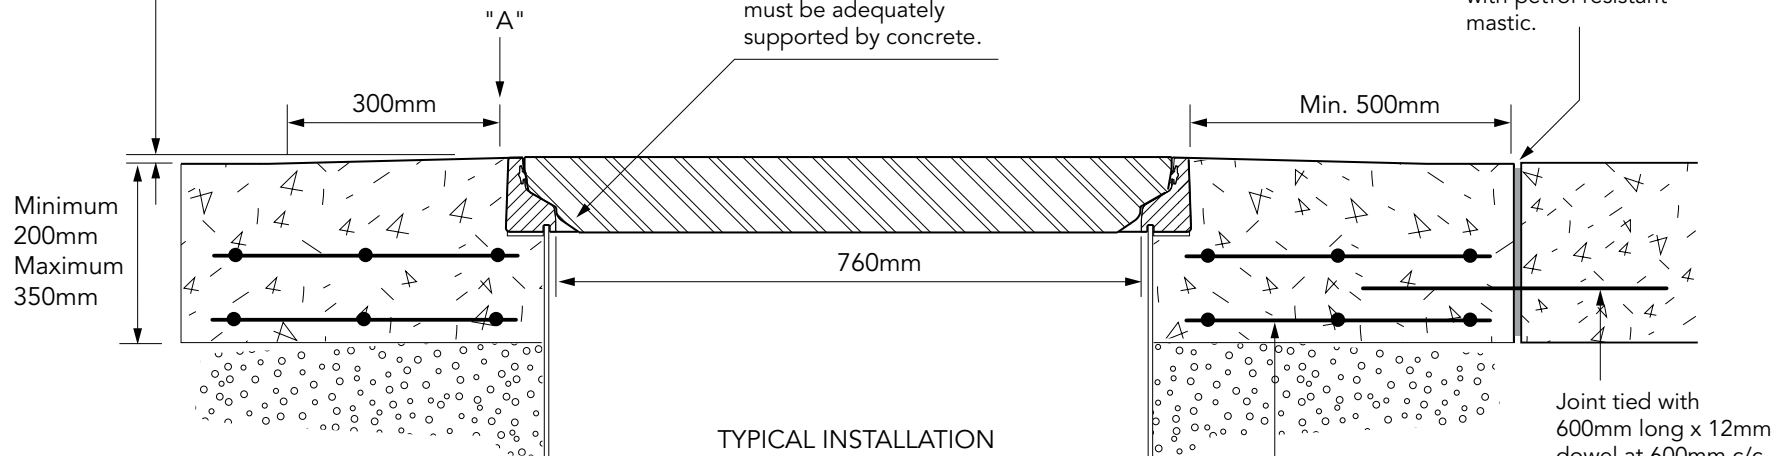


TYPICAL INSTALLATION

	TARMACADAM		PEA GRAVEL		CONCRETE		SAND
-----------------------------------------------------------------------------------	------------	-----------------------------------------------------------------------------------	------------	-----------------------------------------------------------------------------------	----------	------------------------------------------------------------------------------------	------


Concrete reinforced with 2 layers of reinforcement mesh.

Joint tied with 600mm long x 12mm dowel at 600mm c/c. Half bonded

TARMACADAM

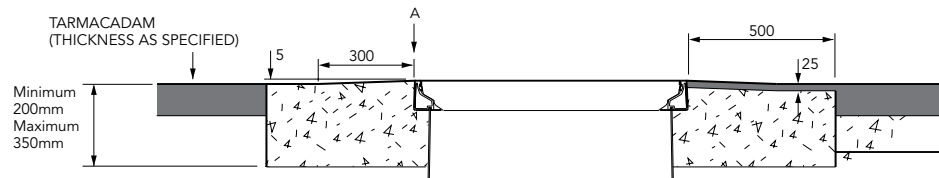

SETTS

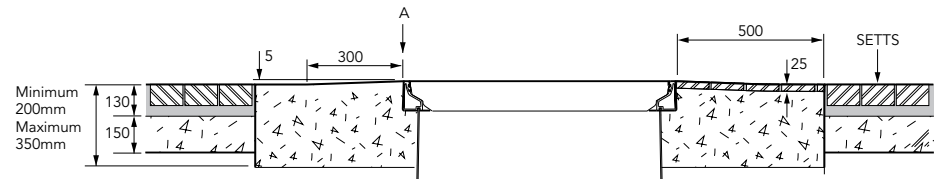

760mm x 760mm flat sealed composite cover with an aluminium frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



PART OF
OPW
A DOVER COMPANY